

TECHNICALDATASHEET

TECHNYL® A 218 V30 Natural is a polyamide 66, reinforced with 30% of glass fibre, heat stabilized, for injection moulding. This grade offers an excellent combination between thermal and mechanical properties.

GENERAL

Material Status	• Commercial: Active	
Availability	• Africa&MiddleEast • Asia Pacific • Europe	• Latin America • North America
Filler / Reinforcement	• Glass Fiber, 30% Filler by Weight	
Additive	• Heat Stabilizer	
Key Benefits	• Good Dimensional Stability • GoodFlow • Heat Aging Resistance	• HeatStabilized(Inorganic) • Good Mold Release
Applications	• Automotive applications	• Fixationsystems
Certification/Compliance	• EC1907/2006(REACH)	• ULQMFZ2
RoHS Compliance	• RoHS Compliant	
Automotive Specifications	• FORD WSK-M4D642-A • FORD WSK-M4D752-A	• PSA Peugeot-Citroën SPA X62 4178
Colors Available	• Black	• NaturalColor
Forms	• Pellets	
Processing Method	• Injection Molding	
Resin ID (ISO 1043)	• PA66-GF30	

PROPERTIES

Typical values of properties are for Natural grades

Physical	Dry	Conditioned Unit	TestMethod
Molding Shrinkage			ISO 294-4
Across Flow	1.1	%	
Flow	0.40	%	
Water Absorption			ISO 62
24 hr, 23°C	0.80	%	
Equilibrium, 23°C, 50% RH	1.7	%	
Density	1.36	g/cm³	ISO 1183/A
Mechanical	Dry	Conditioned Unit	TestMethod
Tensile Modulus (23°C)	10000	7500 MPa	ISO527-2/1A
Tensile Stress (Break, 23°C)	190	135 MPa	ISO527-2/1A
Tensile Strain (Break, 23°C)	3.0	7.0%	ISO 527-2
FlexuralModulus			
23°C	9000	MPa	ASTM D790
23°C	9000	6400 MPa	ISO 178

Mechanical	Dry	Conditioned Unit	TestMethod
Flexural Strength			
23°C	290	MPa	ASTM D790
23°C	290	215 MPa	ISO 178
Charpy Notched Impact Strength (23°C)	11	15 kJ/m²	ISO 179/1eA
Charpy Unnotched Impact Strength			
23°C	75	88 kJ/m²	ISO 179/1eU
23°C	70	kJ/m²	ISO 179/1fU
Notched Izod Impact			
23°C	120	J/m	ASTM D256
23°C	10	18 kJ/m²	ISO 180
Unnotched Izod Impact Strength (23°C)	60	65 kJ/m²	ISO 180/1U
Thermal	Dry	Conditioned Unit	TestMethod
Deflection Temperature Under Load			
0.45 MPa, Unannealed	255	°C	ASTM D648
0.45 MPa, Unannealed	260	°C	ISO 75-2/Bf
1.8 MPa, Unannealed	255	°C	ISO 75-2/Af
Melting Temperature	262	°C	ISO 11357-3
Electrical	Dry	Conditioned Unit	TestMethod
Surface Resistivity	6.0E+15	1.0E+13 ohms	IEC 60093
Volume Resistivity	1.0E+15	1.0E+15 ohms·cm	IEC 60093
Electric Strength (2.00 mm)	34	29 kV/mm	IEC 60243-1
Relative Permittivity	3.70	4.00	IEC 60250
Dissipation Factor	0.010	0.11	IEC 60250
Comparative Tracking Index (Solution A)	400	V	IEC 60112
Flammability	Dry	Conditioned Unit	TestMethod
Flame Rating (1.6 mm)	HB		UL94
Glow Wire Flammability Index (1.6 mm)	700	°C	IEC 60695-2-12
Oxygen Index	23	%	ISO 4589-2

PROCESSING

Injection	Dry Unit
Drying Temperature	80°C
Suggested Max Moisture	0.20 %
Rear Temperature Middle	270 to 280 °C
Temperature Front	275 to 285 °C
Temperature Mold	280 to 290 °C
Temperature	70 to 100 °C

Injection Notes

The material is supplied in airtight bags, ready for use. In case that the virgin material has absorbed moisture, it must be dried with a dehumidified air drying equipment, dew point mini -20°C. Recommended time 2-4h

Injection Advice:

- For reinforced polyamides, Solvay recommends the use of steel with a high content of carbon, and purified for polishing, to avoid or limit the abrasion. For example: X38CrMoV5-1 (EN Norm) - 1.2367 /1.2343 (DIN Norm) or X160CrMoV12 (EN Norm) - 1.2601 /1.2379 (DIN Norm). In the case of high requirements on surface quality a mould temperature of up to 120°C can be considered.
- The processing parameters like processing temperatures are a recommendation and can be adjusted in function of injection machine size, part geometry / design

DISCLAIMER

The information contained in this document is given in good faith based on our current knowledge. It is only an indication and it is in no way binding. This information must on no account be used as a substitutive for necessary prior tests which alone can ensure that a product is suitable for a given use. ANY WARRANTY OF PRODUCT PERFORMANCE, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IS EXPRESSLY EXCLUDED. Users are responsible for ensuring compliance with local legislation and for obtaining the necessary certifications and authorizations. Users are requested to check that they are in possession of the latest version of this document, and Solvay is at their disposal to supply any additional information.

SAFETY INFORMATION

Detailed information regarding safety are available on the safety data sheet (SDS). SDS is sent with the first material order or available by contacting our customer services

REGULATIONS COMPLIANCE

This product is not intended to be used for the following regulated market: food contact, drinking water, toys, cosmetics or medical devices.

This grade complies with ROHS Directive 2011/65/EU and 2015/863 as amended.

Grades produced or imported in Europe comply with REACH directive 1907/2006/EC as amended.


CUSTOMER SERVICES

Our customer services are not only concerned with manufacturing and supply of Engineering Plastics products. We are available to assist our customers in finding technical solutions that meet their requirements. Specific support is in particular offered on:

- Material selection
- Material testing
- Parts design advice, training for design engineers
- Part testing
- Design simulation
- Processing through different technologies
- Assembly and post-processing technology expertise
- Parts optimization through Computer Aided Design

MULTIPOINT DATA

Isothermal Stress vs. Strain (ISO 11403-1)

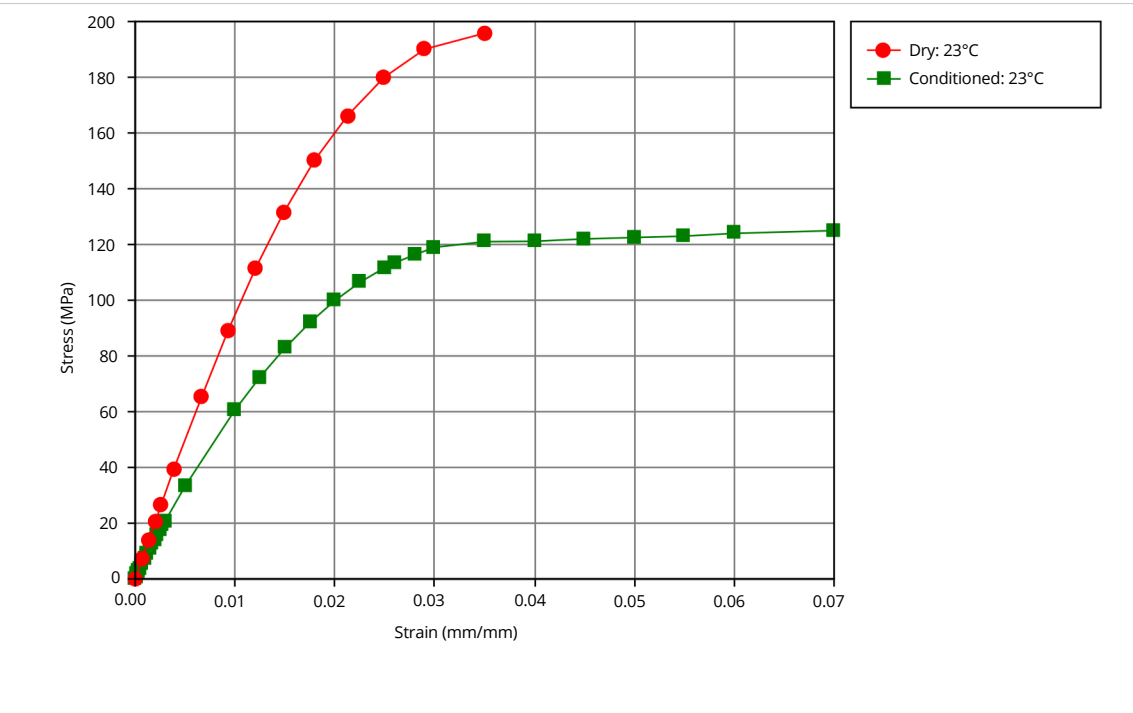

Notes

Typical properties: these are not to be construed as specifications.